



NS-2422-200/300 自動定量噴藥機 (帶自動清洗裝置) Automatic Preset Chemical Spraying Machine (with Automatic Cleaning Facility)



NS-2422-300

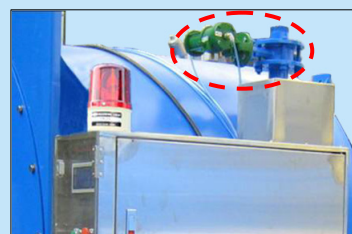

自動清洗裝置氣動入水閥
Pneumatic water inlet valve
(auto cleaning facility)

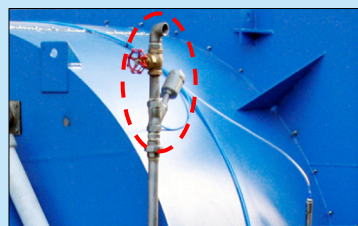

自動清洗裝置氣動入蒸汽閥
Pneumatic steam inlet valve
(auto cleaning facility)

- 主要用於對衣物織品等定時、定量噴藥，提高衣物防皺處理效果
- 採用PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作，可選擇設定噴藥動作、時間、步驟等
- 加壓噴嘴，霧化極佳，衣物吸收藥水更均勻
- 帶自動清洗裝置，內膽清洗方便
- 備有藥水缸低水位感應功能，實現定量噴藥
- 變頻器控制均衣及松衣轉速，速度可按衣物要求行選擇設定
- 主要部件採用不銹鋼製造，堅固耐用

- It is mainly suitable for spraying chemical to fabric according to the preset time and chemical volume so as to improve wrinkle-free finishing effect greatly
- Apply PLC and human friendly touch screen for operation, in which the spraying action, time, steps, etc. could be set
- High pressure nozzle for best mist result and more uniform chemical absorbing result
- With auto cleaning system, convenient for inner drum cleaning
- Chemical tank low-level monitoring function could help to realize preset chemical spraying
- Inverter controls garment poising and loosening speed. You could set different speed for different garment
- Main parts are made of stainless steel, durable

型號 Model	電源 Power Supply	馬達功率 Motor Power (kW)	內桶尺寸 Inner Drum (mm)	壓縮空氣壓力 Compressed Air Pressure (kgf/cm ²)	耗壓縮空氣量 Compressed Air Consumption (L/min)	蒸汽壓力 Steam Pressure (kgf/cm ²)	耗蒸汽量 Steam Consumption (kg / cycle)	淨重 Net Wt. (kg)	機身尺寸 Machine size (mm)
NS-2422-200	3PH/380V/50Hz	2.2	Φ1370x1040	4~6	150	4~5	15	1119	2286 x 1670 x 2006
NS-2422-300		4	Φ1778x1040		180	4~5	21	1500	2435 x 2000 x 2250



藝誠(余氏)發展有限公司
Ngai Shing Development Ltd.,

香港九龍長沙灣永康街52-54號地下

G/F., 52-54 Wing Hong St.,

Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishinghk.com

Fax: (852) 2785 3149, 2745 2966 Http://www.ngaishinghk.com